


8X  $\phi$  18.5  
12MM DEEP


8X  $\phi$  10.5  
THRU

THRU HOLES SIZED FOR M10 SHCS SCREWS.


MINIMUM OF 5 THREADS OF ENGAGEMENT RECOMMENDED FOR MOUNTING SCREWS.

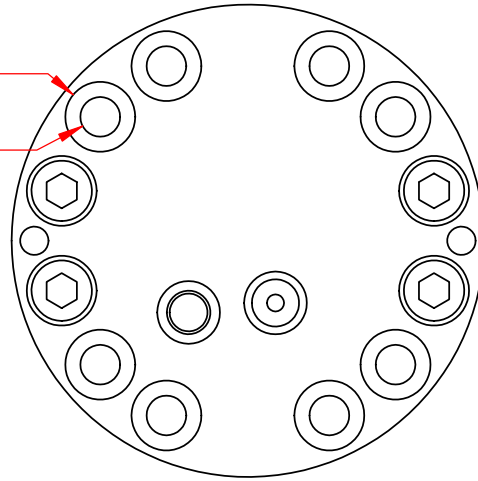

ALL 8 MOUNTING SCREWS MUST BE USED AND PROPERLY TORQUED IN ORDER TO MAINTAIN SPECIFIED METER PRESSURE RATING.

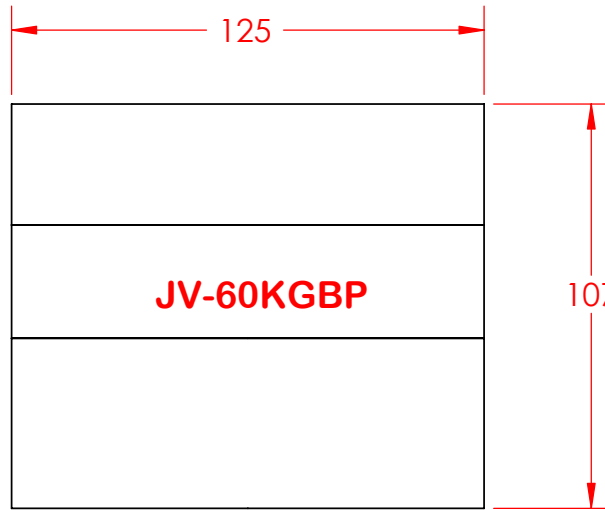

LOCATION OF THRU HOLES FOR MANIFOLD MOUNTING SCREWS

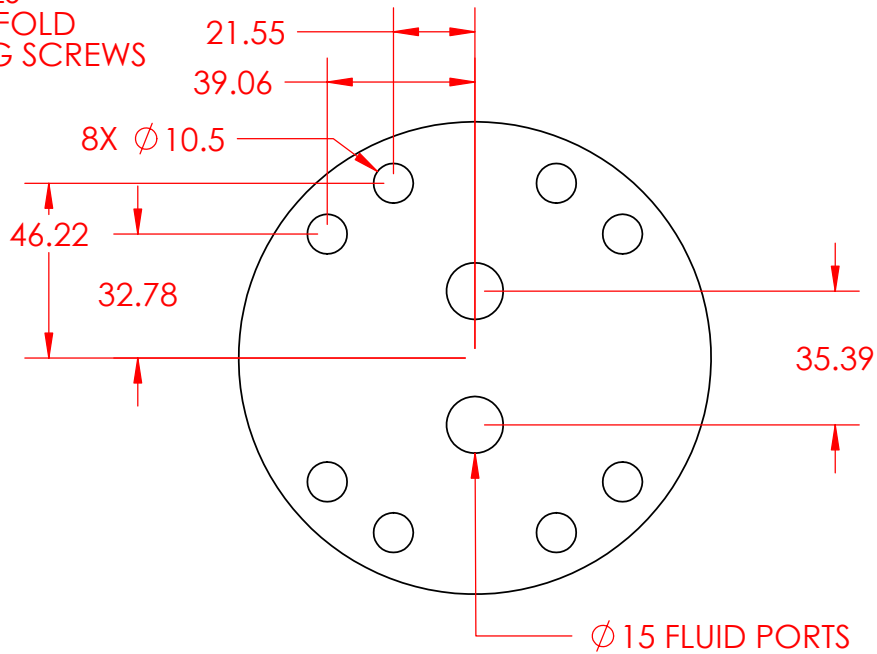

CUSTOMER IS RESPONSIBLE FOR PLACING PORT ORINGS IN MANIFOLD.

REV.	DESCRIPTION OF CHANGE	DATE	BY
A	INITIAL RELEASE	11/07/05	CH

DIMENSIONS IN MILLIMETERS

AW COMPANY USE ONLY

THIS PRINT, INCLUDING THE INFORMATION CONTAINED IN IT IS THE PROPERTY OF AW COMPANY. IT IS CONSIDERED PROPRIETARY IN NATURE AND MAY NOT BE USED OR DISCLOSED OUTSIDE OF AW COMPANY, EXCEPT UNDER PRIOR WRITTEN AGREEMENT. ANY MODIFICATIONS MADE TO OR COMMENTS WRITTEN ON THIS DRAWING BY UNAUTHORIZED PERSONNEL WILL VOID THIS DRAWING. ALL DIMENSIONS SHOWN ARE SUBJECT TO CHANGE WITHOUT NOTICE.



**AW COMPANY**  
8809 INDUSTRIAL DR.  
FRANKSVILLE, WI 53126  
TEL. # (262) 884-9800  
FAX. # (262) 884-9810

TITLE: JV-60KGBP DIMENSIONS	
PART NUMBER: -	
DRAWING NUMBER: KGBP800A	REV: A
DRAWN BY: CHRIS HUSSON	DATE: 04/10/06
CHECKED BY: C.H.	PAGE: 1 OF 1
SCALE: NONE	